

EH & HVT Industrial Convection Heaters




CONVECTION



- Without Thermostat (type EH)
- With Thermostat (type HVT)
- 250 - 1,000 Watts
- 853 - 3,412 Btuh
- 120 and 240 Volt
- Single Phase

Dimensions (Inches)

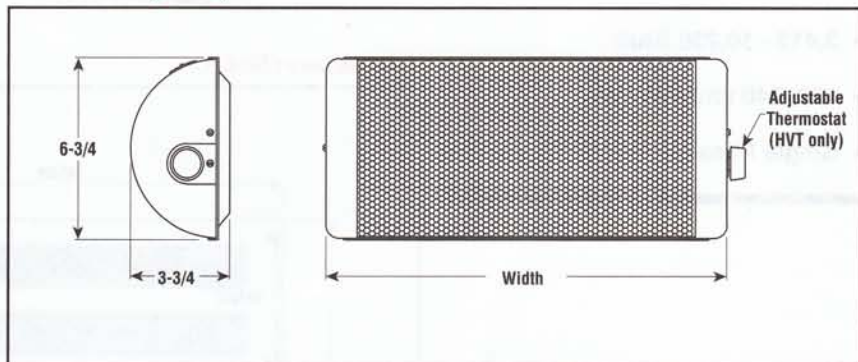

Description

EH and HVT industrial convection heaters are designed for the highest dependability for rough plant areas and small manned or unattended areas.

Applications

- Crane Cabs
- Shop Offices
- Small Plant Areas
- Non-Hazardous Pump Sheds

Construction

Cabinet — Heavy gauge perforated steel case finished in corrosion resistant almond polyester powder coat paint.

Heating Elements are strip type construction and are the most rugged, durable, long-lasting elements available to industry.

Built-in Thermostat — (HVT only). Furnished standard to provide temperatures from 50°F - 110°F.

Advantages

- Long Life
- Rugged for High Traffic Areas
- Easy Installation
- Corrosion Resistant

CAUTION — Not intended for use where flammable vapors, gases, liquids or other combustible atmospheres are present.

Specifications and Ordering Information

kW	Volts	Phase	Amps	Btuh	Dimensions (In.)			Model	Stock	PCN	Wt. (Lbs.)
					Height	Width	Depth				
EH — Without Thermostat											
0.25	120	1	2.1	853	6-3/4	14-5/8	3-3/4	EH-1221	S	261833	7
0.25	240	1	1	853	6-3/4	14-5/8	3-3/4	EH-1221	NS	261841	7
0.5	120	1	4.2	1,706	6-3/4	14-5/8	3-3/4	EH-1251	S	261850	7
0.5	240	1	2.1	1,706	6-3/4	14-5/8	3-3/4	EH-1251	S	261868	7
HVT — With Thermostat											
0.5	120	1	4.2	1,706	6-3/4	28-5/8	3-3/4	HVT-1251	S	240055	13
1	120	1	8.3	3,412	6-3/4	28-5/8	3-3/4	HVT-2411	S	240071	15

Stock Status: S = stock AS = assembly stock NS = non-stock
To Order—Specify model, PCN, kW, volts, phase and quantity.

Refer to
WR-80, WR-90
in the Controls section.